

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
7 July 2005 (07.07.2005)

PCT

(10) International Publication Number
WO 2005/061850 A1

(51) International Patent Classification⁷: **E21B 43/04,**
43/08

(21) International Application Number:
PCT/US2004/033900

(22) International Filing Date: 14 October 2004 (14.10.2004)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
60/526,521 3 December 2003 (03.12.2003) US

(71) Applicant (for all designated States except US): **EXXON-**
MOBIL UPSTREAM RESEARCH COMPANY
[US/US]; P.O. Box 2189, Houston, TX 77252-2189 (US).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **YEH, Charles, S.**

[US/US]; 9511 Merlins Oaks Court, Spring, TX 77379
(US). **DALE, Bruce, A.** [US/US]; 7122 Hidden Trails
Court, Sugar Land, TX 77479 (US).



(74) Agents: **KATZ, Gary, P. et al.**; ExxonMobil Upstream
Research Company, P.O. Box 2189, Houston, TX 77252-
2189 (US).

(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,
AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN,
CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI,
GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE,
KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD,
MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG,
PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM,
TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM,
ZW.

(84) Designated States (unless otherwise indicated, for every
kind of regional protection available): **ARIPO** (BW, GH,

[Continued on next page]

(54) Title: **WELLBORE GRAVEL PACKING APPARATUS AND METHOD**

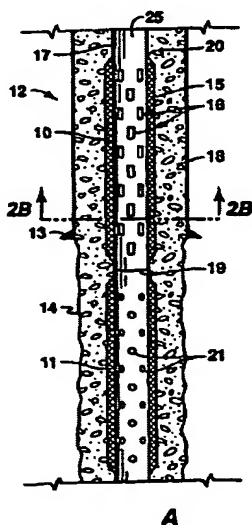

(57) Abstract: A wellbore apparatus and method for use in a wellbore for completion and production are disclosed. The apparatus comprises an outer permeable material (15) in the wellbore comprising a first basepipe section (11) with at least a portion of the basepipe is perforated (21), the first basepipe is inside the outer permeable material (15) and at least part of the perforated basepipe is designed to be adjacent to a production interval (14), a second basepipe section (10) with at least a portion of the second basepipe is slotted (16), the second basepipe is inside the outer permeable material (15) and above the perforated basepipe section (11) designed to be adjacent to the production interval wherein at least a portion of the slotted basepipe is designed to be adjacent to a non production section of the wellbore. The production completion apparatus may be installed into the wellbore to provide redundancy against well-screen failure.

WO 2005/061850 A1